

This drawing and the design hereon is the property and copyright of:
Consult h-b Limited (Chb)
and shall only be used for the purpose(s) for which it is loaned. This drawing is issued on condition that it is not to be copied , reproduced, retained or disclosed to an unauthorised party, either wholly or in part without the written consent of Chb.


DO NOT SCALE from this drawing.

WORK TO FIGURED DIMENSIONS ONLY.


All dimensions to be verified and any discrepancies reported to Chb without delay.

NOTES

- The information included on this Drawing is intended for the Purpose of Gaining Approval to the Building Regulations Part A - Structure and not for any other purpose.
- This Drawing shall be Read in Conjunction with The Architects Drawings and Relevant Details, Project Specifications and the Like.
- Concrete to be Grade RC40 to Supplier's Design Mix
Maximum Size of Aggregate = 20mm
Maximum Free Water/Cement Ratio = 0.55
Cover to Reinforcement = 30mm (All Faces)
- For Details of Reinforcement refer to B85 Ref:7011-106-01
- Ensure all other associated Details are Coordinated and in Place Prior to Casting
- Finish to be As Struck

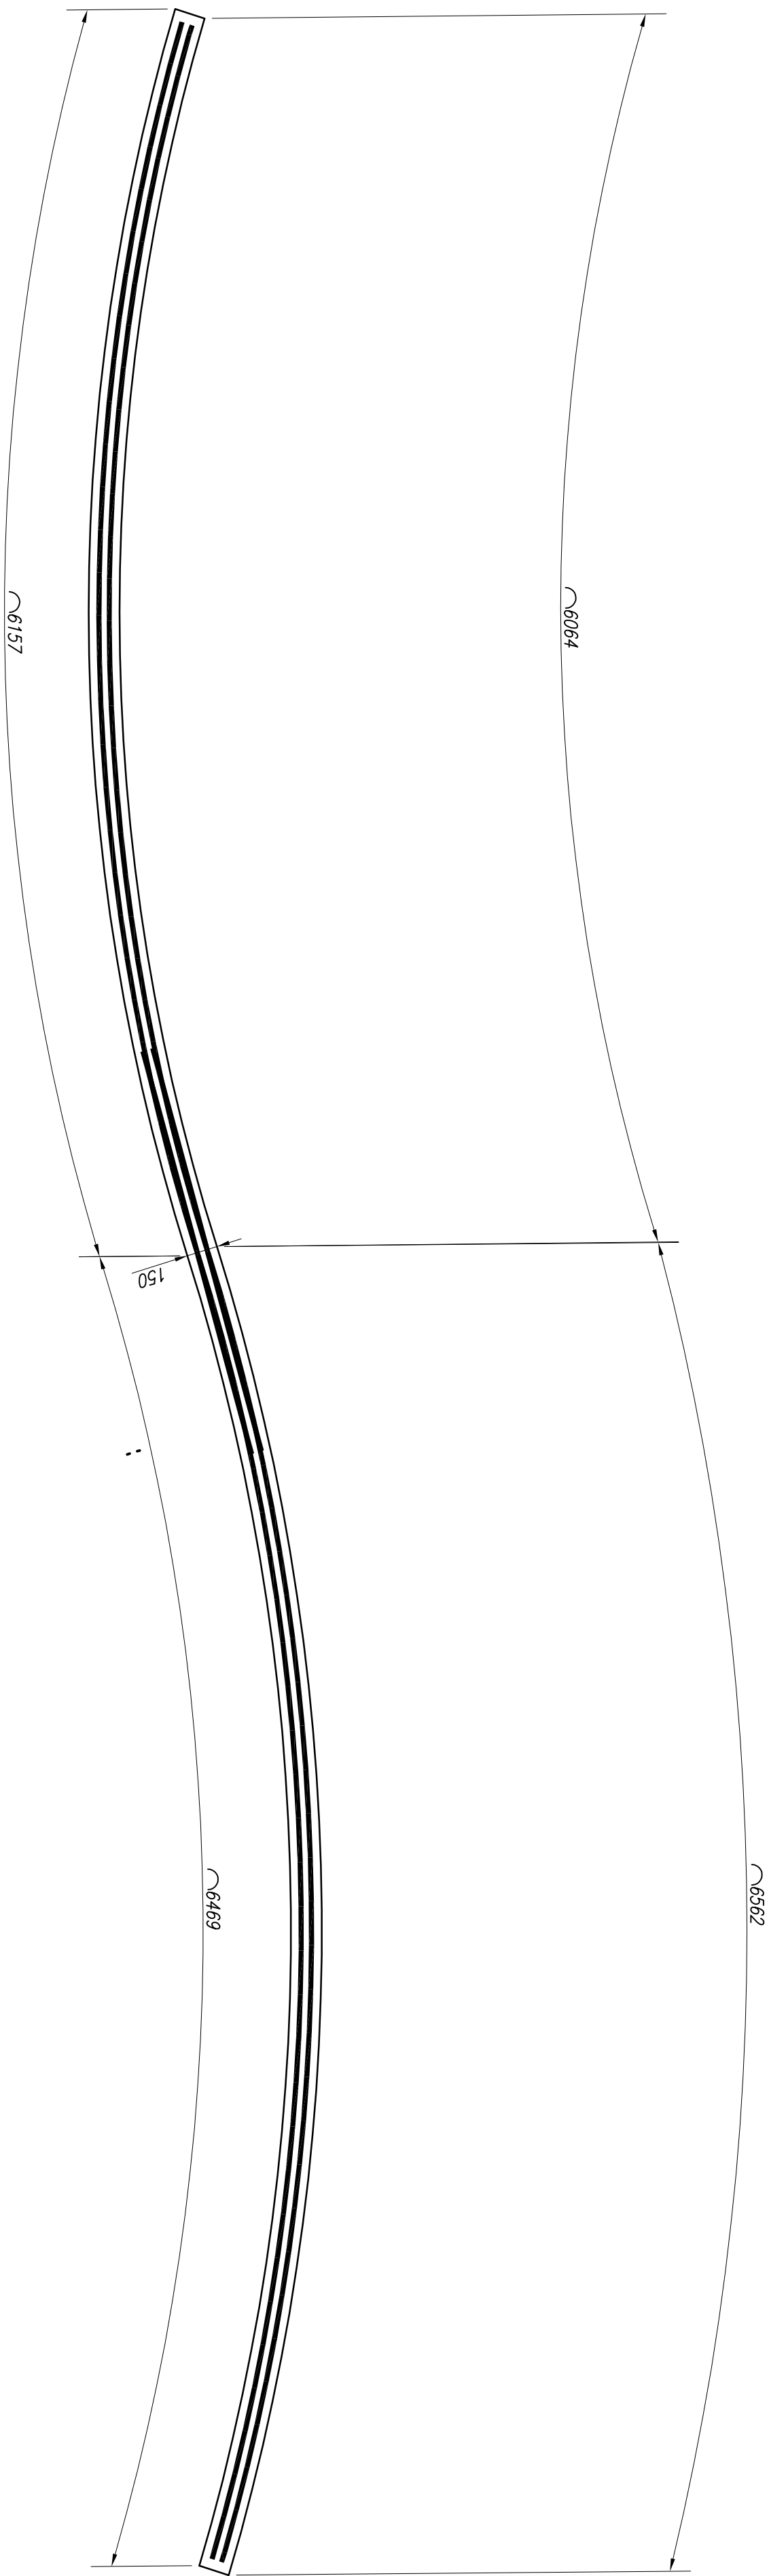

Plan on Beam

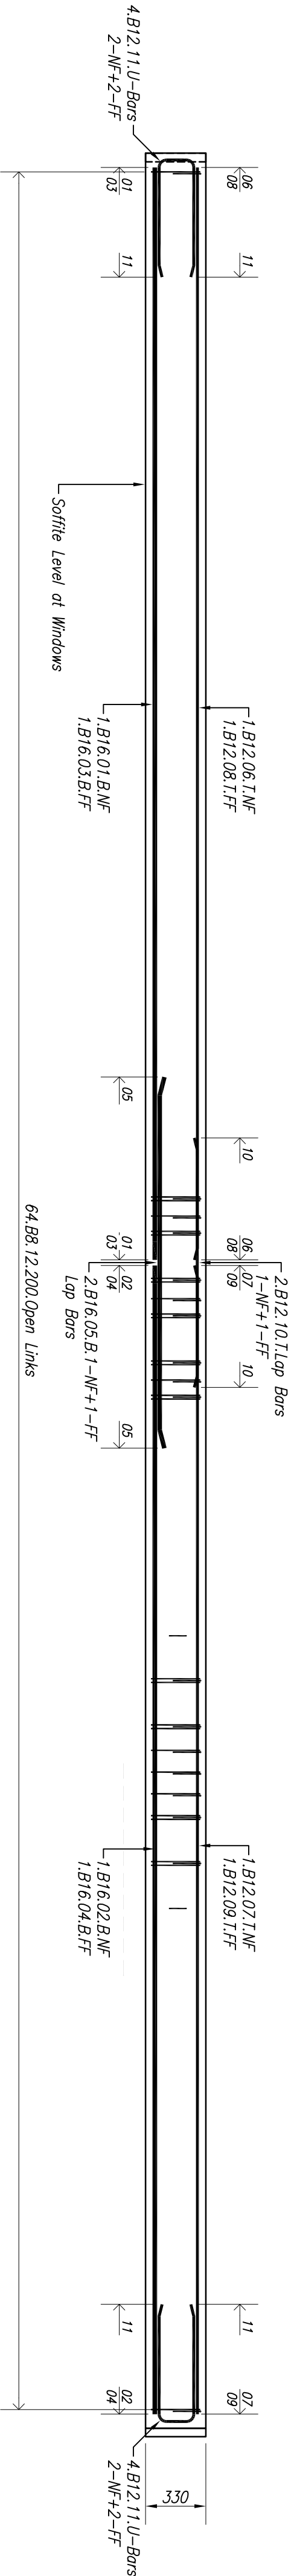

Elevation on Beam

ALL DIMENSIONS
SUBJECT TO
FINAL SETTING OUT
[Refer to ODS Drawings]

PROJECT
Horseshoe Lane Chadlington
New House

DRAWING TITLE
Reinforcement Details
UCF Reinf - Eaves Beam

SCALE @ A1
1:20
BY CHB
C/O kpb
DATE Jul 18

STATUS
Preliminary
DRAWING REF
7011 / 106
REV
p1

KEITH P BARNES
CHARTERED ENGINEER
0771 424 6225
CONSULT@HUSBARNES.CO.UK
Consult h-b

THE FIRM
CIVIL ENGINE
CHADGROVE
OXFORDSHIRE
OX44 7RH

CLIENT
Mr & Mrs Bryars